












**PERFECT WATER**  
THROUGHOUT THE HOME

# **QUICK SELECTION GUIDE**

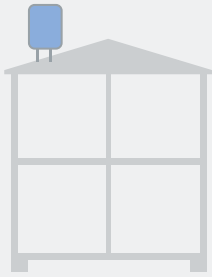FOR PRESSURE BOOSTING
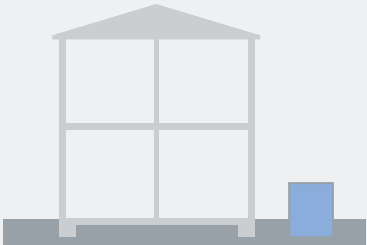
## PRESSURE BOOSTING - PUMP SELECTION

Use the table below to select the best Grundfos pump for any type of water supply task. Once you've settled on a pump model, use the corresponding sizing guide to get the perfect fit.

	Good	Better	Best
<p><b>POSITIVE INLET PRESSURE</b> (down to 1 metre below ground level)</p>  <p>Boosting from roof tank</p>		 <p>SCALA1</p>	 <p>SCALA2</p>
 <p>Boosting from tank</p>	 <p>Jet pump &amp; booster</p>	 <p>SCALA1</p>	 <p>SCALA2</p>
 <p>Boosting from mains</p>	 <p>SCALA1</p>	 <p>SCALA2</p>	 <p>CME BOOSTER</p>

## PRESSURE BOOSTING - PUMP SELECTION

Use the table below to select the best Grundfos pump for any type of water supply task. Once you've settled on a pump model, use the corresponding sizing guide to get the perfect fit.

		Good	Better	Best
NEGATIVE INLET PRESSURE	 <p>Boosting from well or tank with a depth of less than 8 metres</p>	<b>DRY INSTALLED</b>  <b>Jet pump &amp; booster</b>	 <b>SCALA1</b>	 <b>SCALA2</b>
		<b>SUBMERGED</b>  <b>SB with PM1 or PM2</b>	 <b>SBA</b>	
	 <p>Boosting in well, tank or borehole with a depth of more than 8 metres</p>		 <b>SQ</b>	 <b>SQE CONSTANT PRESSURE PACKAGE</b>

# PRESSURE BOOSTING - QUICK SIZING

○ Tapping point

## Ex. sizing and selection

- Required comfort level:**  
- Adjustable constant pressure
- Find the right booster:**  
- How many taps: 6 taps  
- How many floors: 3 floors
- Result: **CMBE 1-44****

Taps	1-5	6-10
Floors		
4	CMBE 1-75	CMBE 1-75
3	CMBE 1-44	CMBE 1-44
2	CMBE 1-44	CMBE 1-44
1	CMBE 1-44	CMBE 1-44

## ADJUSTABLE CONSTANT PRESSURE LEVEL










<p><b>CMBE</b></p>	Floors\Taps	1-5	6-10	11-20	21-50
	4	CMBE 1-75	CMBE 3-62	CMBE 5-62	—
	3	CMBE 1-44	CMBE 3-62	CMBE 5-62	—
	2	CMBE 1-44	CMBE 3-62	CMBE 5-62	—
	1	CMBE 1-44	CMBE 3-30	CMBE 3-30	—










<p><b>CMBE TWIN (Duty/Assist)</b></p>	Floors\Taps	1-5	6-10	11-20	21-50
	4	—	—	—	CMBE TWIN 5-62
	3	—	—	—	CMBE TWIN 5-62
	2	—	—	—	CMBE TWIN 5-62
	1	—	—	—	CMBE TWIN 5-31

<p><b>SCALA2</b></p> <p>· All-in-one design · Dry-run protection</p>	Floors\Taps	1-5	6-10	11-20
	4	SCALA2 3-45*	—	—
	3	SCALA2 3-45	SCALA2 3-45	—
	2	SCALA2 3-45	SCALA2 3-45	—
	1	SCALA2 3-45	SCALA2 3-45	SCALA2 3-45

# PRESSURE BOOSTING - QUICK SIZING

## CONVENTIONAL PUMP CONTROL

 <p><b>SCALA1</b></p> <ul style="list-style-type: none"> <li>· All-in-one booster</li> <li>· Water on demand</li> <li>· Self-priming</li> </ul>	Floors\Taps	 1-5	 6-10	 11-20	 21-50
	 4	SCALA1 3-45*	SCALA1 5-55	—	—
	 3	SCALA1 3-45	SCALA1 3-45	SCALA1 5-55	—
	 2	SCALA1 3-35	SCALA1 3-45	SCALA1 5-55	—
	 1	SCALA1 3-25	SCALA1 3-35	SCALA1 3-45	—


 <p><b>SCALA1 TWIN (Duty/Assist)</b></p> <ul style="list-style-type: none"> <li>· Easy solution for twin-booster</li> <li>· Easy installation</li> <li>· Enabled for Grundfos GO Remote</li> </ul>	Floors\Taps	 1-5	 6-10	 11-20	 21-50
	 4	—	—	SCALA1 TWIN 5-55	SCALA1 TWIN 5-55
	 3	—	—	—	SCALA1 TWIN 5-55
	 2	—	—	—	SCALA1 TWIN 5-55
	 1	—	—	—	SCALA1 TWIN 5-55


 <p><b>Jet pump &amp; booster</b></p> <ul style="list-style-type: none"> <li>· Easy to install</li> <li>· Self-priming</li> <li>· Robust design</li> </ul>	Taps or m <sup>3</sup> /h			
		1-5 taps 1-2 m <sup>3</sup> /h	6-10 taps 3-4 m <sup>3</sup> /h	11-20 taps 4-5 m <sup>3</sup> /h
	Manually controlled water supply	JP 3-42	JP 4-47/54	JP 5-48
	Constant water supply with pressure-drop compensation	JP 3-42 PT-V/H	JP 4-47/54 PT-V/H	JP 5-48 PT-V/H
Constant water supply. Dry-running protection and anti-cycling function	JP 3-42 PM	JP 4-47/54 PM	JP 5-48 PM	

**PRECONDITIONS**  
 • 3 bar tap pressure is considered, to achieve 4 bar pressure add 2 more floors • Flooded Suction • 0.5 l/s per tap average, usage pattern is taken into account

# PRESSURE BOOSTING - QUICK SIZING

## CONVENTIONAL PUMP CONTROL


 <p><b>SBA</b></p>	Application	Recommended pump
	<b>One-storey house</b> For toilet flushing, washing machine, car washing and garden watering	SBA 3-35
	<b>Two-storey house</b> For toilet flushing, washing machine, car washing and garden watering	SBA 3-45

 <p><b>SB</b></p>	General recommendation	Application	Recommended pump
	If the distance from tank wall to the pump is above 1.5 metres (4.9 feet), the model with side inlet should be selected. If the distance from tank wall to the pump is less 1.5 metres (4.9 feet), the model with suction strainer should be selected.	<b>One-storey house</b> For toilet flushing, washing machine, car washing and garden watering	SB 3-35
		<b>Two-storey house</b> For toilet flushing, washing machine, car washing and garden watering	SB 3-45


**PRECONDITIONS**  
 • 3 bar tap pressure is considered, to achieve 4 bar pressure add 2 more floors • Flooded Suction • 0.5 l/s per tap average, usage pattern is taken into account

# GROUNDWATER - QUICK SIZING - PUMP

## FLOW SIZING

 <p><b>SQ</b></p> <ul style="list-style-type: none"> <li>· Compact design</li> <li>· Built-in motor protection</li> <li>· Easy installation</li> </ul>	Kitchen sink	Dish washer, washing machine	Toilet w. wash basin and WC	Bathroom w. wash basin, WC and shower	Bathroom w. wash basin, WC and bathtub	Garden and lawn irrigation	Nominal flow [m <sup>3</sup> /h]	Recommended pump size	
	Small house	1		1				1	SQ1
	Medium house	1	2	1	1			2	SQ2
	Large house	2	2		1	1	2	3	SQ3
				2 x large house				5	SQ5
			3 x large house				7	SQ7	

## HEAD SIZING

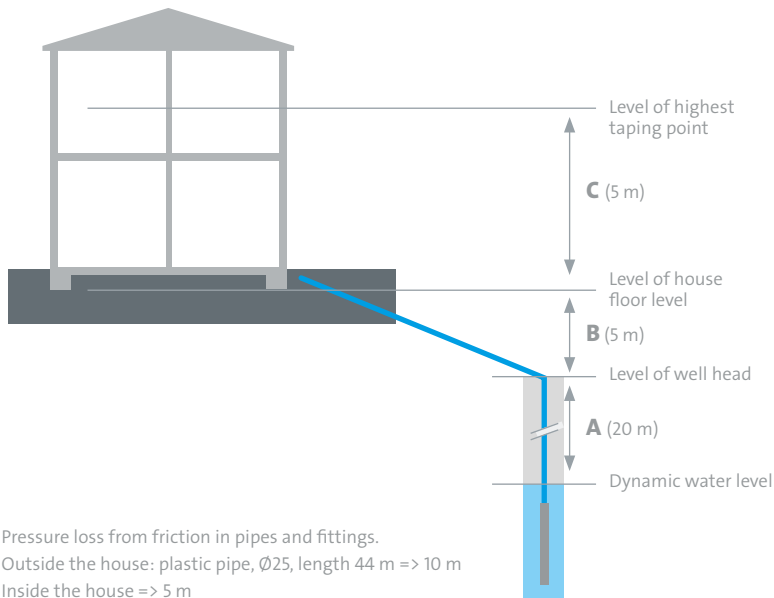

### Calculate max. pressure required

1. Pressure (H) at the tap requiring max. pressure = X
2. Static head (A + B + C) = Y
3. Pressure loss from friction in pipes and fittings = Z

$$H_{\text{total}} = X + Y + Z$$


### Example of calculation

1. Pressure at the tap (max pressure): 3 bar = 30 m
2. Static head: 20 m + 5 m + 5 m = 30 m
3. Pressure loss from friction in pipes and fittings: 10 m + 5 m = 15 m

Maximum pressure required:

$$H_{\text{total}} = 30 \text{ m} + 30 \text{ m} + 15 \text{ m} = \mathbf{75 \text{ m}}$$

## PUMP SELECTION

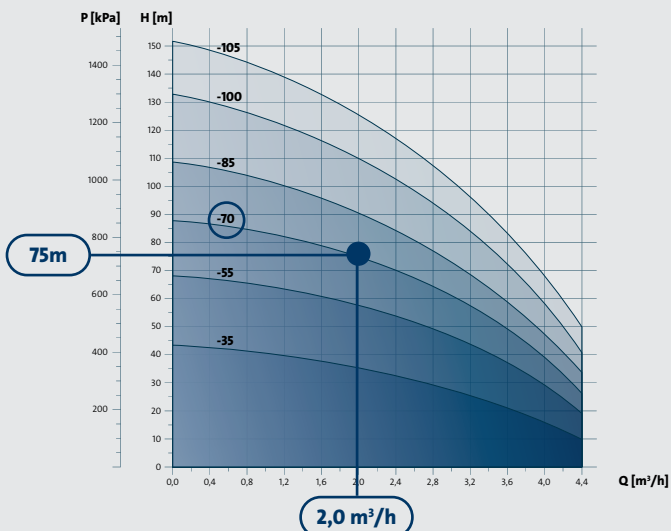

### Example of flow sizing

#### Medium house


=> Nominal flow **2 m<sup>3</sup>/h** => Pump size **SQ2**

Pump choice


**SQ 2 - 70**

# GROUNDWATER - QUICK SIZING - CABLE

## MAXIMUM CABLE LENGTH

 <p><b>SQ CABLE</b> · Supply voltage 240 V · 5% voltage drop</p>	P2 [kW]	I <sub>MAX</sub> [A]	Wire cross sectional area [mm <sup>2</sup> ]			
			1.5	2.5	4.0	6.0
				Maximum cable length [m]		
	0.70	5.2	86	144	230	346
	1.15	8.4	53	89	142	214
	1.68	11.2	40	66	107	160
	1.85	12.0	37	62	100	150

## HOW TO SELECT THE CROSS-SECTIONAL AREA

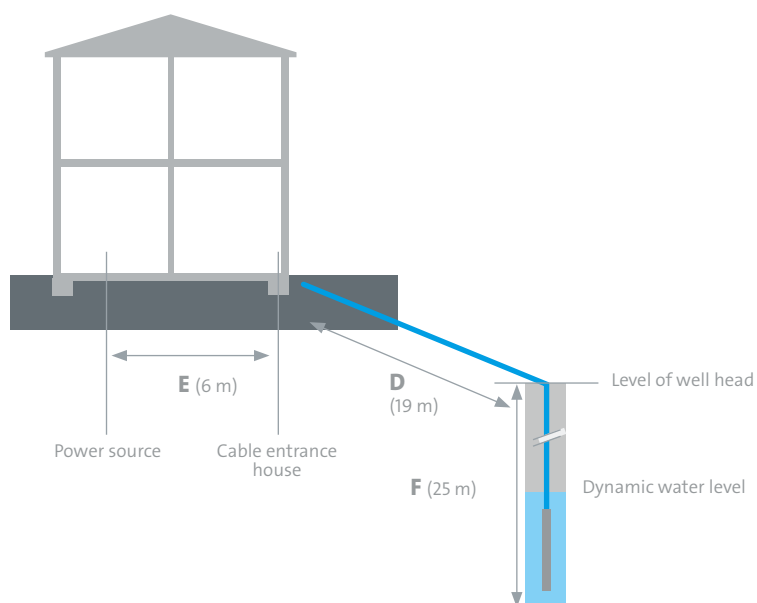

! Supply voltage 240 V 5% voltage drop and cable supplied by Grundfos.

### How to select the cross-sectional area of the individual wire of a submersible drop cable

1. Select SQ pump incl. motor size
2. Required total length of cable (D + E + F)
3. Read the cross-sectional area of individual wire of the drop cable

Example:

1. SQ pump incl. motor size  
**SQ 2-70, motor size 1,15 kW**
2. Distance from pump to the power source  
(outside 44 m (D + F) + inside 6 m (E))  
**50 m**
3. Selected cross-sectional area  
**1,5 mm<sup>2</sup>**